


Description

Q-Tech's surface-mount QTCT230 oscillators consist of an IC 3.3Vdc TCXO built in a low profile ceramic package with gold plated contact pads.

Features

- ECCN: EAR99
- Frequency range from 10.000000MHz to 45.000000MHz
- Small footprint
- Clipped Sine logic
- 2.8, 3.0, 3.3Vdc supply
- Operating temperature -40°C to +85°C available
- Optional Free Tuning
- Hermetically sealed ceramic package
- Military screening tests per MIL-PRF-55310 for Class 3 devices is available
- Tape and reel packaging
- Lead Free, RoHS Compliant
- VCTCXO Option

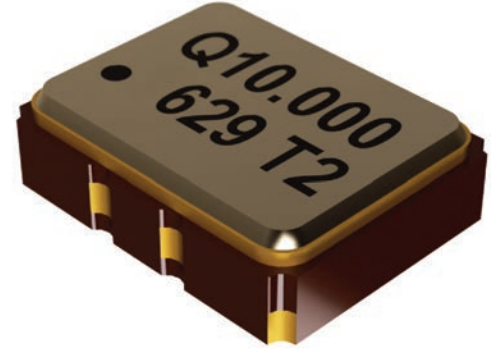

Applications


- Designed to meet today's requirements for low voltage applications
- Instrumentation
- Navigation
- Avionics
- Ethernet/SynchE
- Base Station
- Global Positioning Systems (GPS)
- Manpack Radio
- FEMTO Cells

Stock List

See all QTCT products [IN STOCK](#)

Ordering is NOT limited to the IN STOCK list. Please consult with our sales managers to order custom frequencies.

Ordering Information

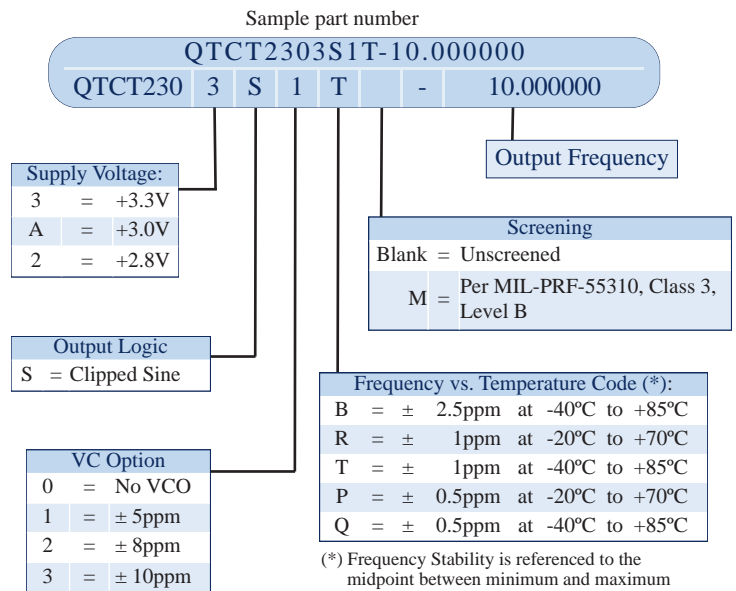

Other Options Available For An Additional Charge

- Hot Solder Dip Sn60/Pb40 per MIL-PRF 55310

Specifications subject to change without prior notice.

Frequency stability vs. temperature codes may not be available in all frequencies.
 For Non-Standard requirements, contact Q-Tech Corporation at Sales@Q-Tech.com




Q-TECH
CORPORATION


QTCT230 SERIES
2.5 x 3.2mm MINIATURE SMD TEMPERATURE CONTROLLED CRYSTAL OSCILLATORS
2.8 to 3.3Vdc - 10.000000MHz to 45.000000MHz

Package Outline and Pin Connections

Dimensions are in inches (mm)

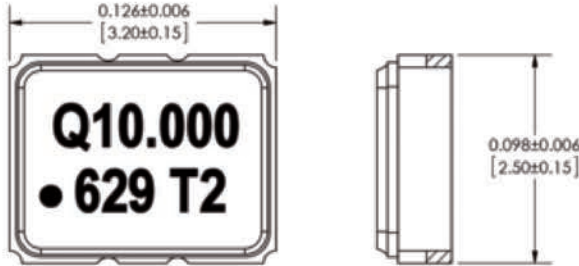

Pin No.	Function
1	VC or NC
2	GND/CASE
3	OUTPUT
4	VDD

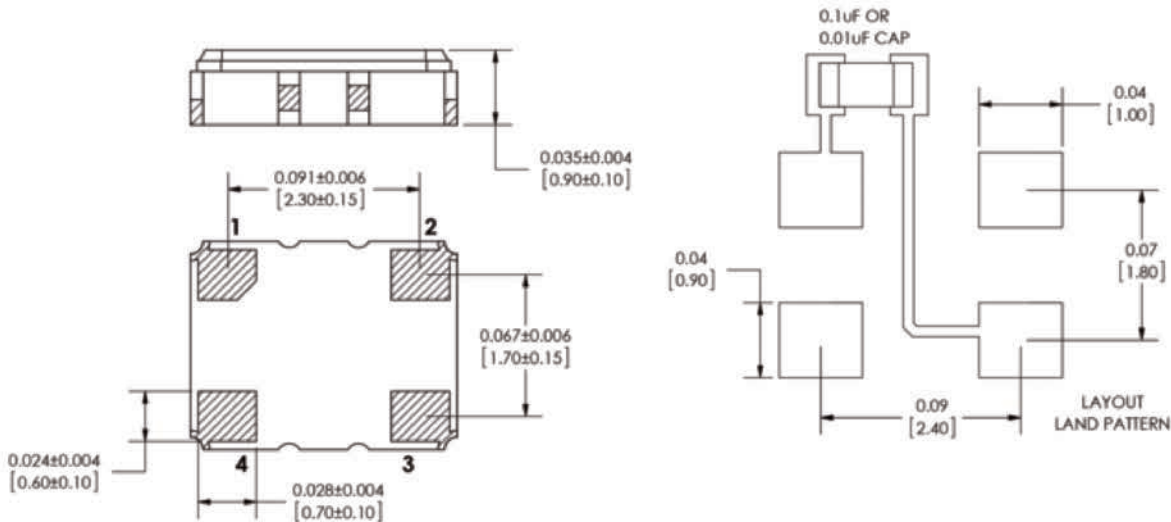

An external bypass capacitor 0.01µF is required between Vdd and GND

Marking

Line 1: QXX.XXX (Q for Q-Tech, no space 7 Characters of Frequency including decimal)
Line 2: Dot (Pin 1 Indicator) + Date code (Y/WW), Internal Traceability Code

Package Information

- Termination pads (4x), Electro nickel plating 1.27µm ~ 8.89µm typ., with gold 0.3µm ~ 1.0µm flash plate
- Weight: 0.025g typ.

Electrical Characteristics

Parameters	QTCT230
Output frequency range (Fo)	10.000000MHz — 45.000000MHz
Logic	Clipped Sine
Supply voltage (Vdd)	2.8, 3.0, 3.3Vdc ± 5%
Supply current (Idd)	1.5 mA max. - < 20MHz 2.0 mA max. - 20MHz ~ < 32MHz 2.5 mA max. - 32MHz ~ ≤ 45MHz
VCO Option (Tuning Range)	See Part Number on Page 1
Operating temperature (Topr)	See Part Number on Page 1
Storage temperature (Tsto)	-40°C to + 85°C
Start-up time (Tstup)	2ms max.
Output voltage (Voh/Vol)	Vop-p = 0.8V
Output Load	10k 10pF
Control Voltage to reach Pull Range	0.5V min. 2.5V max.
Control Voltage Impedance	500kΩ min.
Phase Noise typ. at 19.2MHz	
10Hz	-91 dBc/Hz
100Hz	-116 dBc/Hz
1kHz	-137 dBc/Hz
10kHz	-149 dBc/Hz
100kHz	-150 dBc/Hz
Frequency Tolerance (Ftol) at 25°C	±2.0ppm
Power Supply Stability ±5% (Fpwr)	±0.2ppm
Load Stability ±10% (Fload)	±0.2ppm
Aging	±1.0ppm 1st year




Q-TECH
CORPORATION




QTCT230 SERIES
2.5 x 3.2mm MINIATURE SMD TEMPERATURE CONTROLLED CRYSTAL OSCILLATORS
2.8 to 3.3Vdc - 10.000000MHz to 45.000000MHz

Reflow Profile

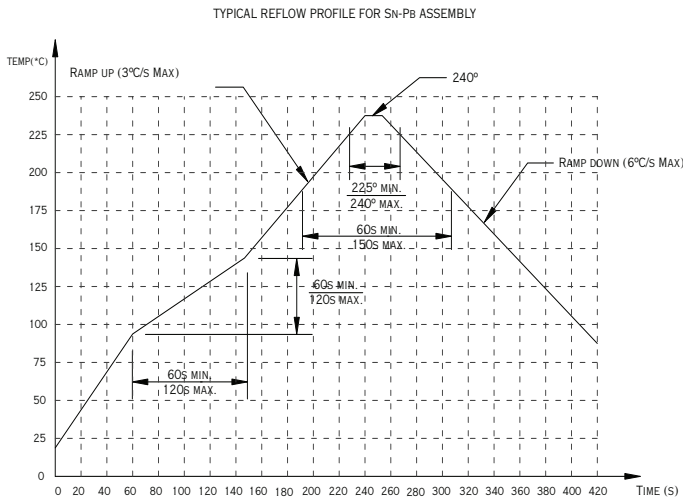

Embossed Tape and Reel Information

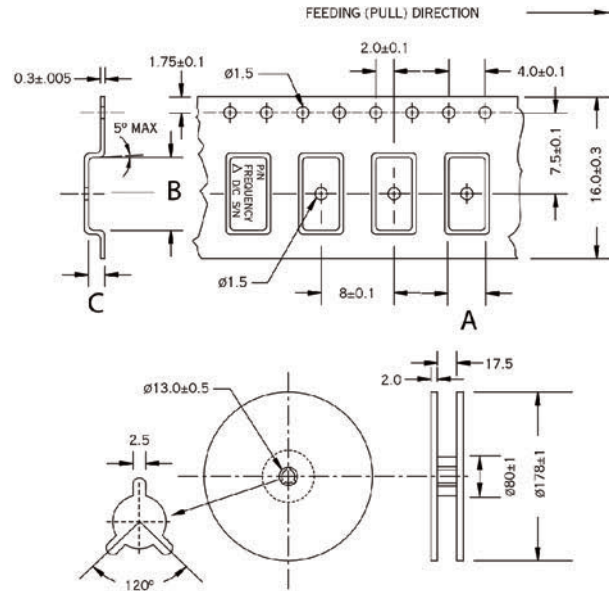

Package	A	B	C
QTCT 230	2.80 ±0.1	3.50 ±0.1	1.50 ±0.1
Reel size (Diameter in mm)	178		
Qty per reel (pcs)	1,000		

Environmental and Mechanical Specifications

Environmental Test	Test Conditions
Temperature cycling	MIL-STD-883, Method 1010, Cond. B
Constant acceleration	MIL-STD-883, Method 2001, Cond. A, Y1
Seal: Fine and Gross Leak	MIL-STD-883, Method 1014, Cond. A and C
Vibration sinusoidal	MIL-STD-202, Method 204, Cond. D
Shock, non operating	MIL-STD-202, Method 213, Cond. I
Resistance to solder heat	MIL-STD-202, Method 210, Cond. B
Resistance to solvents	MIL-STD-202, Method 215
Solderability	MIL-STD-202, Method 208
ESD Classification	MIL-STD-883, Method 3015, Class 1
Moisture Sensitivity Level	J-STD-020, MSL=1



Q-TECH
CORPORATION



QTCT230 SERIES
25 x 3.2mm MINIATURE SMD TEMPERATURE CONTROLLED CRYSTAL OSCILLATORS
2.8 to 3.3Vdc - 10.000000MHz to 45.000000MHz

DCO	REV	REVISION SUMMARY	PAGE	DATE
6169	A	Add 'VCTCXO Option' in description	1	2/3/2017
		Storage temp changed -55C to -62C	3	
		'Phase noise' changed to 'Phase noise typ. at 12.8MHz'		
		Frequency tolerance changed from 1.5ppm to 2.0ppm		
6654	B	Changed date code on package markings from YYWW to YWW	2	4/10/2017
		Add correct tape/reel dimensions	4	
		Add temperature code B, P, and Q	1	
		Revised 'Applications'	1	
10038	C	Revise Frequency format to six digits after decimal (for ordering info)	All	06/14/2019
11947	D	Add Note (*) for frequency temperature stability	1	07/01/2020
13935	E	Add 'Class 3' to MIL-PRF-55310 screening for clarification of requirements	1	10/26/2021
		Change Storage Temperature	3	